

# Type V strip

Vertical strip



- Linear strips on a semi-concealed grid with notches.
- The strip is suspended vertically with an open gap of 100, 150 or 200 mm.

## Key product features

**Aesthetics:** conceals the plenum when viewed at an angle, while creating an impression of space and light

**Safety:** high air space ratio for active fire protection systems

**Dimensions:** different heights available, and long lengths possible

**Ideal for:** shopping malls

## Related systems

- LINEAR CEILINGS  
Linear strip  
Vertical strip on semi-concealed grid system TYPE V  
[PLAFOMETAL-LC-140]

## Characteristics and performance



**Light reflection**  
Up to 87%



**Indoor air quality**  
Class A+



**Reaction to fire** (according to EN 13501-1)  
Euroclass A1



**Active fire protection** (according to EN 12845)  
If sprinklers are fitted above an open-cell suspended ceiling, the total plan open area of the ceiling, including light fittings, must not be less than 70% of the ceiling plan area.



CE marking (according to EN 13964)  
DoP no.: 0007-200

## Colors

- **Standard White two-sided (RAL 9003)**  
Polyester prepainted
- **Metallic Gray two-sided (RAL 9006)**  
Polyester prepainted


## Dimensions & Packing

Dimensions (mm)	
Length	On request. Recommended dimensions between 900 and 6,000 mm.
Height*	100
Packaging	
According to the length. Strips are supplied in even numbers.	

Aluminum strip (thickness 0.5 or 0.6 mm)  
Recommended maximum gap equal to the height of the strip  
Air space ratio greater than 80% of the 100 mm gap  
\*Other heights on request

# Type V strip

Framed installation:  
[PLAFOMETAL-LC-140]

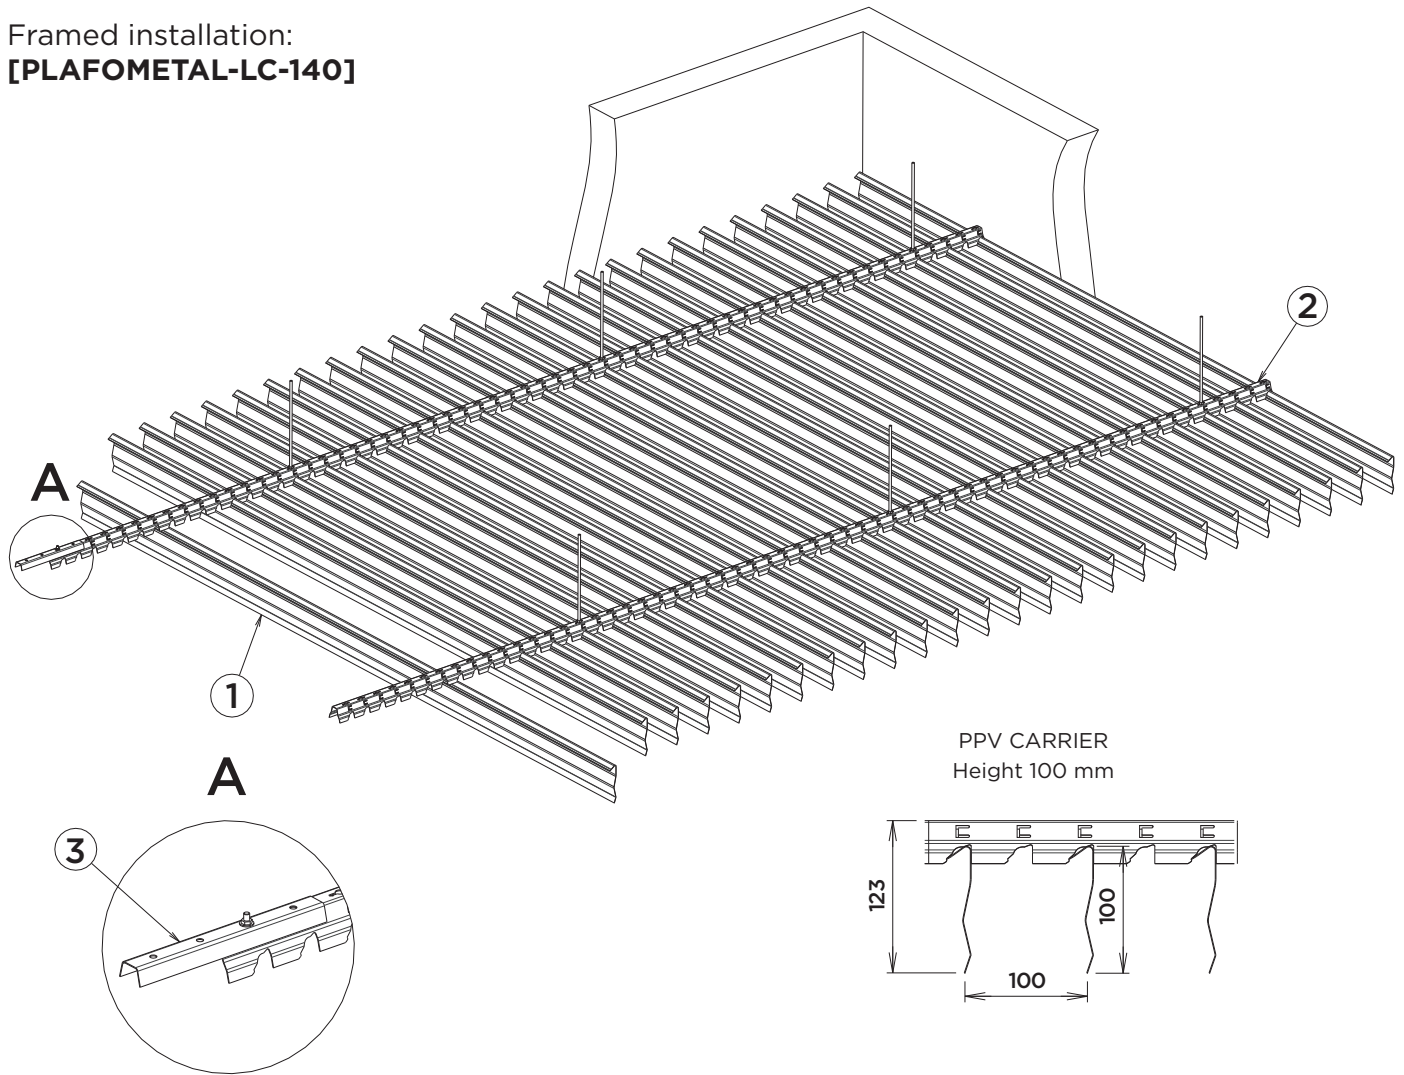

No.	Illustration	Article code	Component	Sales unit	Billing unit	Quantity (in billing units)	
1		Contact us	Type V strip	lm	lm	10 for a 100-mm gap	Per m <sup>2</sup>
2		PPV50	Carrier for Type V strips* leng. 4 m	Pack (10 units)	lm	$\frac{1}{\text{Carrier center spacing (lm)}}$	
3		RPC	PPV carrier splice	Pack (10 units)	Unit	$\frac{1}{\text{Carrier center spacing (lm)} \times 4}$	
Option 4	/	N3103H	Decorative black fleece (to be unrolled)	Roller (50 m <sup>2</sup> )	Unit	Optional depending on the configuration	

\* Suspend with 6 mm diameter threaded rods and M6 nuts (not supplied)

## Installation according to DTU 58-1

**Framed installation:** hangers with 1,500 mm centers starting 300 mm from the wall, and carriers with 1,500 mm centers with a 300 mm strip overhang.